




Product Features

- ◆ It has the function of self inspection and alarm, which is convenient for the user to maintain and use. Automatic counting indicating passenger's number.
- ◆ The operating state of the programmable equipment through the built-in small press disk on the main control board.
- ◆ The mechanical structure of anti pinch, anti bump function, in the difficult process of the swing arm in the reset, within the prescribed period of time the motor stop working automatically, the default delay again after reset (until reset), and the intensity is very small (less than 2Kg).
- ◆ When the switching signal is not received, the swing arm is automatically locked.
- ◆ The swing arm is synchronously adjustable (for the double pendulum situation).
- ◆ With the automatic reset function, after the opening, the system will automatically cancel the permission of the user when it is not passed in the prescribed time.
- ◆ Adjustable normally opened or normally closed to meet the requirements of different sites..
- ◆ Can be connected with a variety of card reading equipment to receive relay switch signal work.
- ◆ One way and two way pendulum function, one way or two direction control personnel can get in and out
- ◆ .Remote control and management can be realized directly through the management computer.
- ◆ Time delay automatic reset, the standard is automatically reset 5 seconds after opening

- ◆ swing arm automatic open when power off and closed automatically when power on, comply with fire safety requirements.
- ◆ Sound (light) alarm function, including the illegal intrusion of the alarm, (reverse entry into the shutter) etc.
- ◆ Counting function (optional).
- ◆ Anti clamp function (bridge type 4 pairs of infrared optional).
- ◆ Accurate logical judgment, infrared reset function (4 or 6 pairs of infrared).
- ◆ Voice output, humanized prompts for correct passage (optional).


Spot images

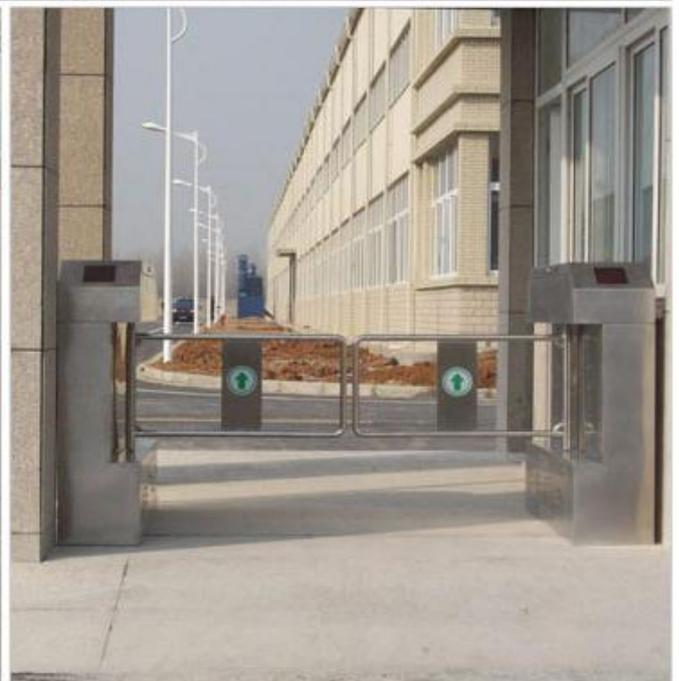


Product data

Model No.	SZAT-B8017
Power voltage	AC220V±10% 50HZ
Drive voltage	AC12V+AC18V
Operation condition	-30℃-70℃
Relative humidity	<95% None-condensation
Input signal	12v DC level or 12v pulse>100ms
Working current	<2000Ma
Length of swing arm	500-600mm
Open angle	90°
Pass speed	Less than 30 person/minutes
Structure	Frame or 304 stainless steel cover
Open direction	Single and double(optional)
Install place	Outdoor and indoor
IP degree	IP43
Width of passage	≤1200mm
Opening or close time	1-2s
Time required to enter the state after power supply	3 seconds
Automatic reset time after failure	10 seconds
Commnication interface	RS485 standard electric appliance,communication distance≤1200mts (access control)
Swing arm drive angle	180°
Product size	1200(L)*280(W)*980(H)mm
Gross weight	70kg

Product size

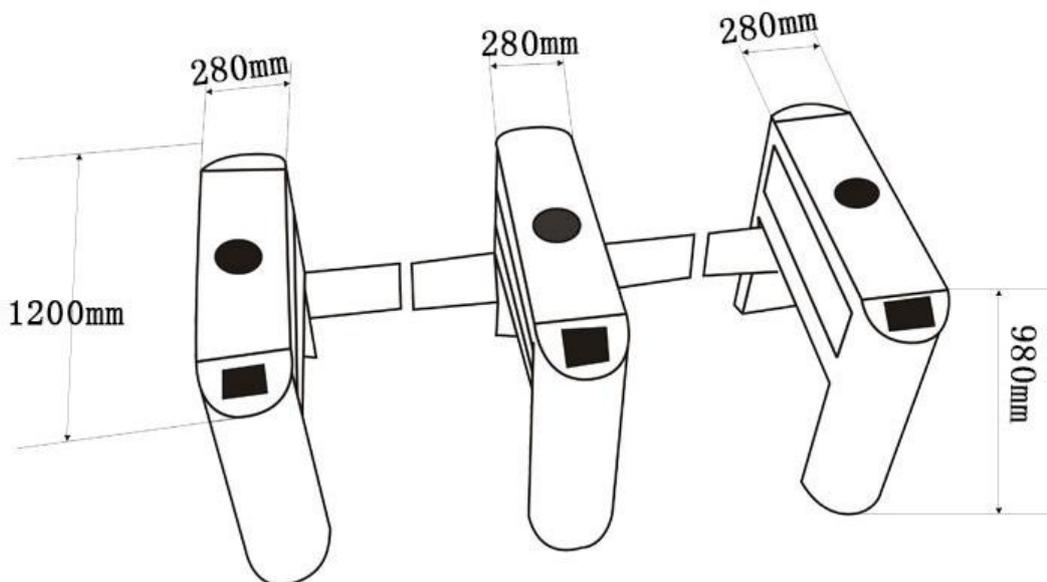

Function display

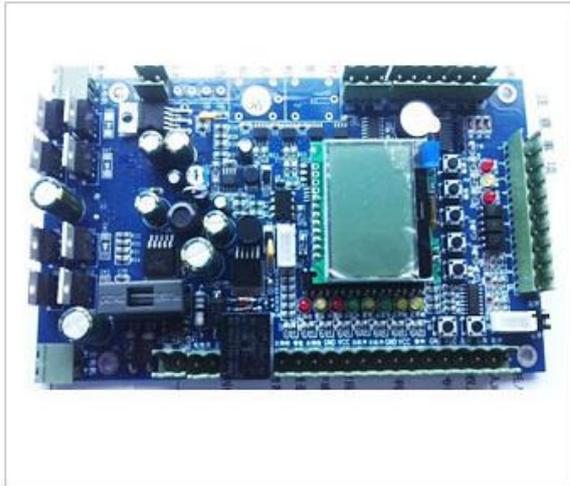


One Main board

- It controls the main circuits, the brain of turnstile, have the core function.

Two The movement

- Could bidirectional read card, or one way read card, another way no access, or one way read card, another way could be pass, Could setting the turnstile working type via control board menu.

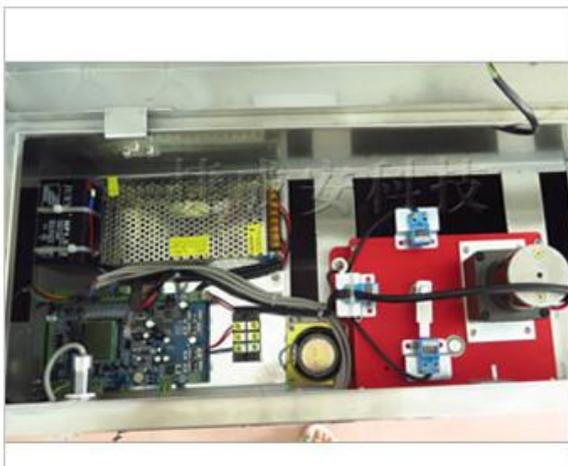


There Machine components

- Arm drops after power off, and arm recover when power on with alarm. High effective parts guarantee machine works well

Application spots:

It is widely used in government buildings, star hotels, bank financial institutions, airports, subway, customs, express bus, Intelligent Building and other lines of entrance.

Access control system (can be optional)

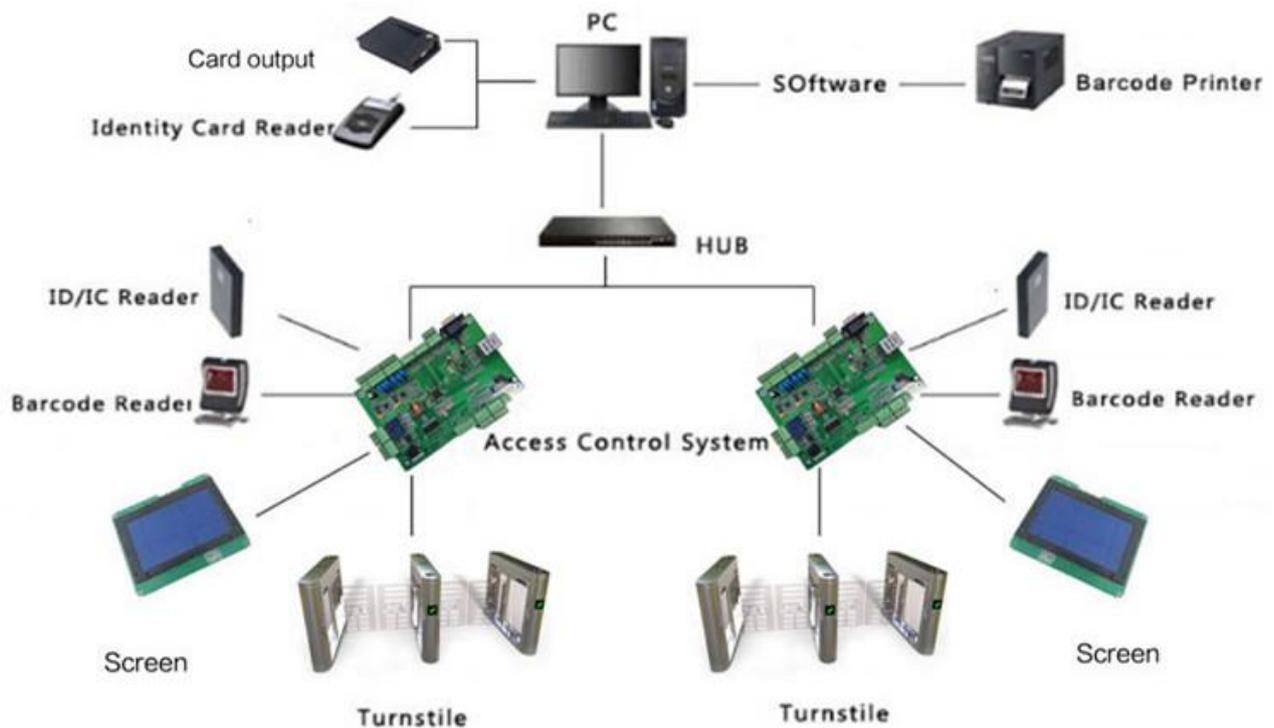


Trade terms & details

Place of Origin	China
Brand Name	AT
Certification	ISO9001 CE ROHS FCC etc
Price	Negotiable
Minimum Order Quantity	1 unit
Packing	Export wooden cases gross weight:70kgs
Delivery Time	5 working days
Payment Terms	T/T , Western Union , L/C
Supply Ability	2000 pcs/month

Packing




Carton box



Wooden box



Standard production flow

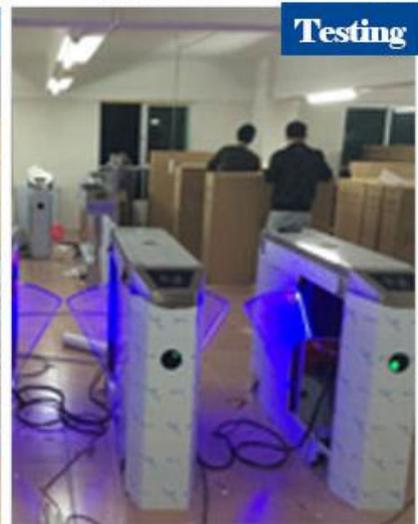

Can be customized



Bar code



fingerprint machine



all-in-one