

Product Features

- ◆ It has the function of self inspection and alarm, which is convenient for the user to maintain and use. Automatic counting indicating passenger's number.
- ◆ The operating state of the programmable equipment through the built-in small press disk on the main control board.
- ◆ The mechanical structure of anti pinch, anti bump function, in the difficult process of the arm in the reset, within the prescribed period of time the motor stop working automatically, the default delay again after reset (until reset), and the intensity is very small (less than 2Kg).
- ◆ Sound and light alarm function: including illegal entry and tailing alarm.
- ◆ Scouring function, the telescopic arm is automatically locked when the switching signal is not received.
- ◆ Telescopic boom synchronization function
- ◆ After power off, the channel is open automatically and the power is closed automatically when power on.
- ◆ Can be connected with a variety of card reading equipment to receive relay switch signal work
- ◆ One way or two way control personnel can get in and out.
- ◆ Remote control and management can be realized directly through the management computer.
- ◆ Extensible function: counting function; chassis lengthening, selection of telescopic arm material

Product description:

The shape of the flap gate is made of SUS304 stainless steel plate, Intelligent flap gate prohibition (blocking) mainly for personnel channel, it is a high-tech product for intelligent management, It is an upgraded product of intelligent tripod turnstile and swing gate.

This product has fine processing, complete function and high grade. It is mainly used in high-end residential areas, Intelligent Building, hotel, subway, wharf, club and other high-end places.

The color of flag arm has white, red and blue to be optional


Spot images



Product data

Model No.	SZAT-Y2008A
Power voltage	AC220V±10% 50HZ
Drive voltage	DC24V 20W
Operation condition	-30℃-70℃
Relative humidity	<95% None-condensation
Input signal	12v DC level or 12v pulse>100ms
Working current	<2000Ma
Length of flap arm	260mm
Communication port	RS485
Pass speed	Less than 30 person/minutes
Structure	Frame or 304 stainless steel cover
Open direction	Single and double(optional)
Install place	Outdoor and indoor
IP degree	IP43
Width of passage	≤600mm
Opening or close time	0.6s
Time required to enter the state after power supply	3 seconds
Automatic reset time after failure	10 seconds
Product size	1200(L)*300(W)*980(H)mm
Gross weight	65kg

Product size

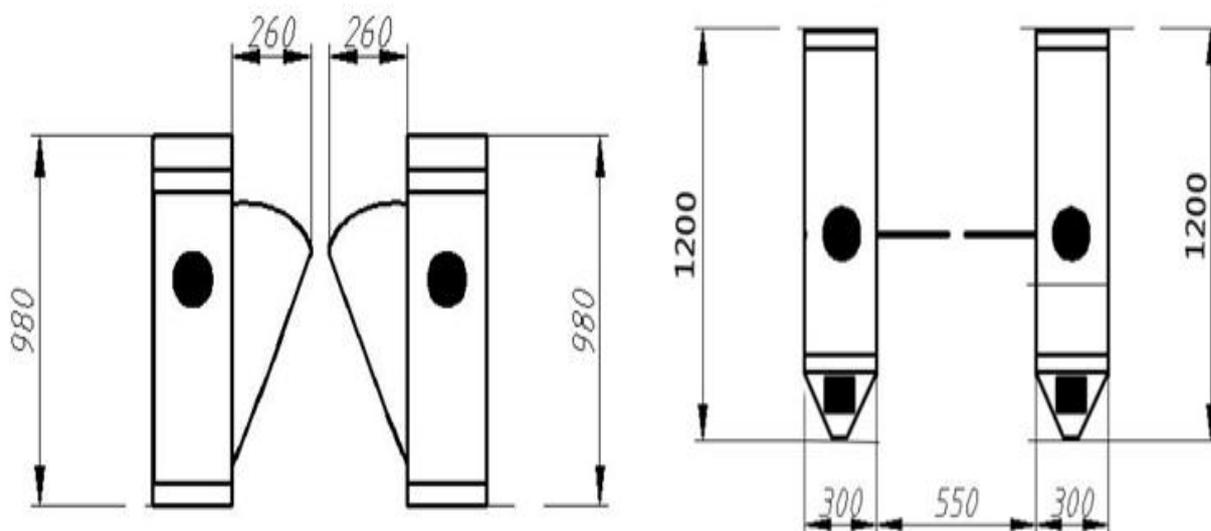

Function display




One Main board

- Could bidirectional read card, or one way read card ,another way no access, or one way read card,another way could be pass,Could setting the turnstile working type via control board menu.

Two The movement

- The turnstile gates in the closed state by external impact, can choose not open the gate with collision ,or can open the gate after the automatic reset function

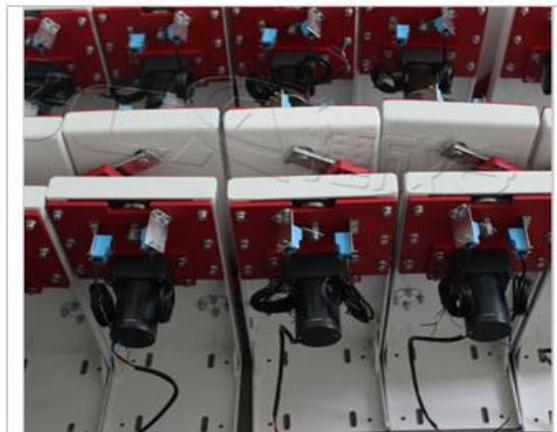


There Machine components

- Nice internal lines, durable long life, three-dimensional tripod

Application spots:

It is widely used in government buildings, star hotels, bank financial institutions, airports, subway, customs, express bus, Intelligent Building and other lines of entrance.

Access control system (can be optional)

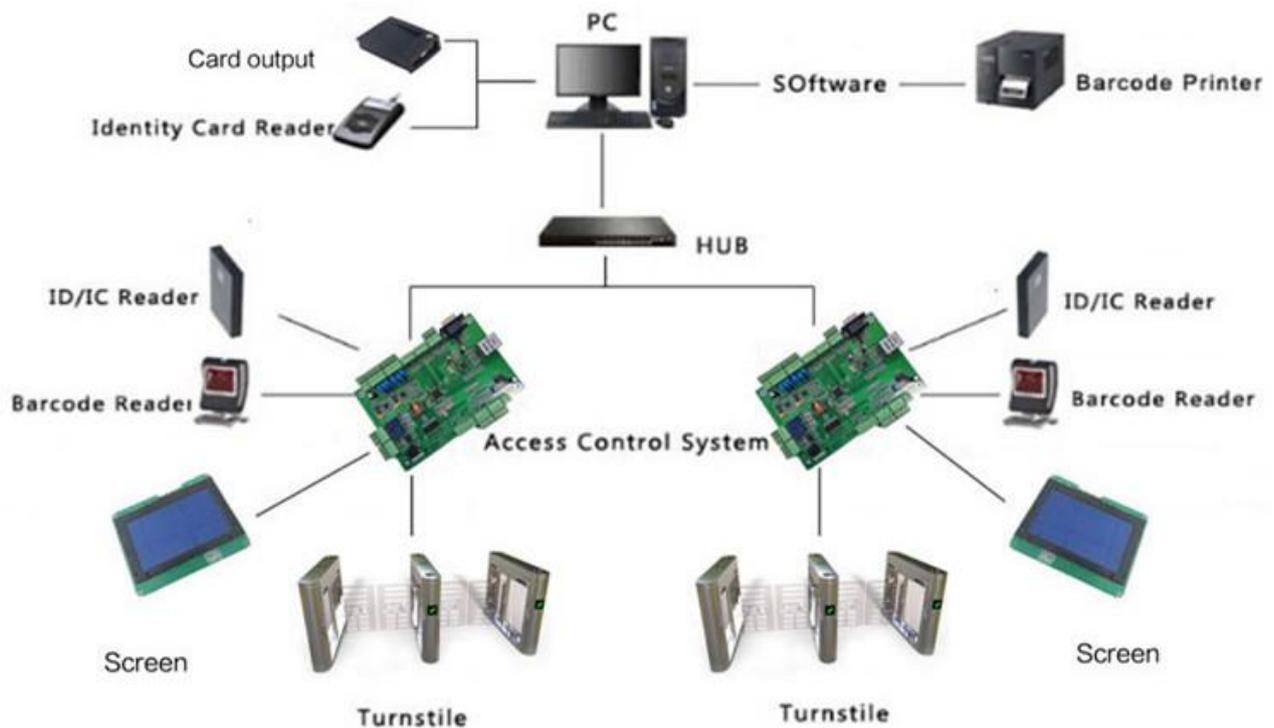


Trade terms & details

Place of Origin	China
Brand Name	AT
Certification	ISO9001 CE ROHS FCC etc
Price	Negotiable
Minimum Order Quantity	1 unit
Packing	Export wooden cases gross weight:65kgs
Delivery Time	5 working days
Payment Terms	T/T , Western Union , L/C
Supply Ability	2000 pcs/month

Packing details



Carton box



Wooden box



Standard production flow



Can be customized



Bar code



fingerprint machine



all-in-one